



NOL-TEC
SYSTEMS

AIR ACTIVATED GRAVITY CONVEYOR

The Nol-Tec air activated gravity conveyor conveys dry granular or powdered materials in a fully enclosed dust-tight housing using either high or low pressure air.

STANDARD FEATURES:

- 10-gauge construction
- Polyester aeration media
- Adjustable inlet location
- Air inlet in each section
- Inspection opening in each section
- Air controls for high or low pressure

OPTIONAL FEATURES:


- Stainless steel construction
 - Stainless steel aeration media
 - Flanged inlet and outlet
 - Multiple inlets and outlets
 - High-temperature design
 - Contact Nol-Tec with any special requirements
- Turning box(s)

SPECIFICATIONS:

- **Compressed air:** Compressed plant supply; positive displacement blower; clean and dry
- **Temperature (polyester membrane):** 310° F maximum

AIR ACTIVATED GRAVITY CONVEYOR

SIZE	A	B	C	D	E
4	3.75"	4"	6"	8.25"	2.00"
6	5.75"	6"	8"	10.25"	2.00"
8	7.75"	8"	10"	12.25"	2.00"
10	9.75"	10"	12"	14.25"	2.00"
12	11.75"	12"	14"	16.25"	2.00"
14	13.75"	12"	16"	16.25"	2.00"
16	15.75"	12"	18"	16.25"	2.00"
18	17.75"	12"	20"	16.25"	2.00"

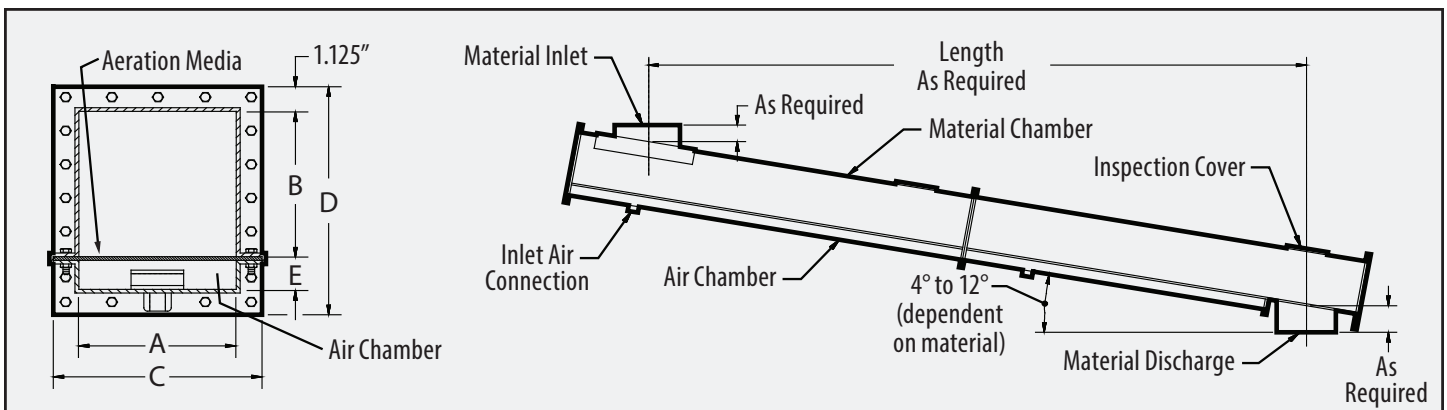

Specifications subject to change without notice.

TRUSTED TO DELIVER™

Nol-Tec Systems, Inc | 425 Apollo Drive | Lino Lakes, MN 55014
651.780.8600 | sales@nol-tec.com | www.nol-tec.com

5.009.SALE.10.23.18.03

