



BLENDING CONE

The Nol-Tec blending cone homogeneously blends dry materials in pneumatic transporters or atmospheric bins.

STANDARD FEATURES:


- Six air injection valve assemblies controlled by single solenoid valve for piston pulsing
- Ceramic valve seat directs air into material at various angles
- Abrasion-resistant urethane valve seal
- Non-restrictive discharge valve with positive position indicator
- Regulated air supply manifold; 2" pipe
- Wear parts are replaceable without removing blending cone from position

SPECIFICATIONS:

- **Weight:** 7 lbs per aerator valve; 175 lbs total
- **Compressed air:** Clean and dry at 80 PSIG minimum
- **Electrical:** 24 VDC
- **Temperature range:** 200° F

OPTIONAL FEATURES:

- Individual solenoid valves for aerator sequencing
- Interior coatings and finishes
- Stainless steel construction
- Hazardous location design
- Special mounting flange
- Sanitary design(M357C)
- High-temperature design
- **Electrical:** 110-120V; 50-60Hz

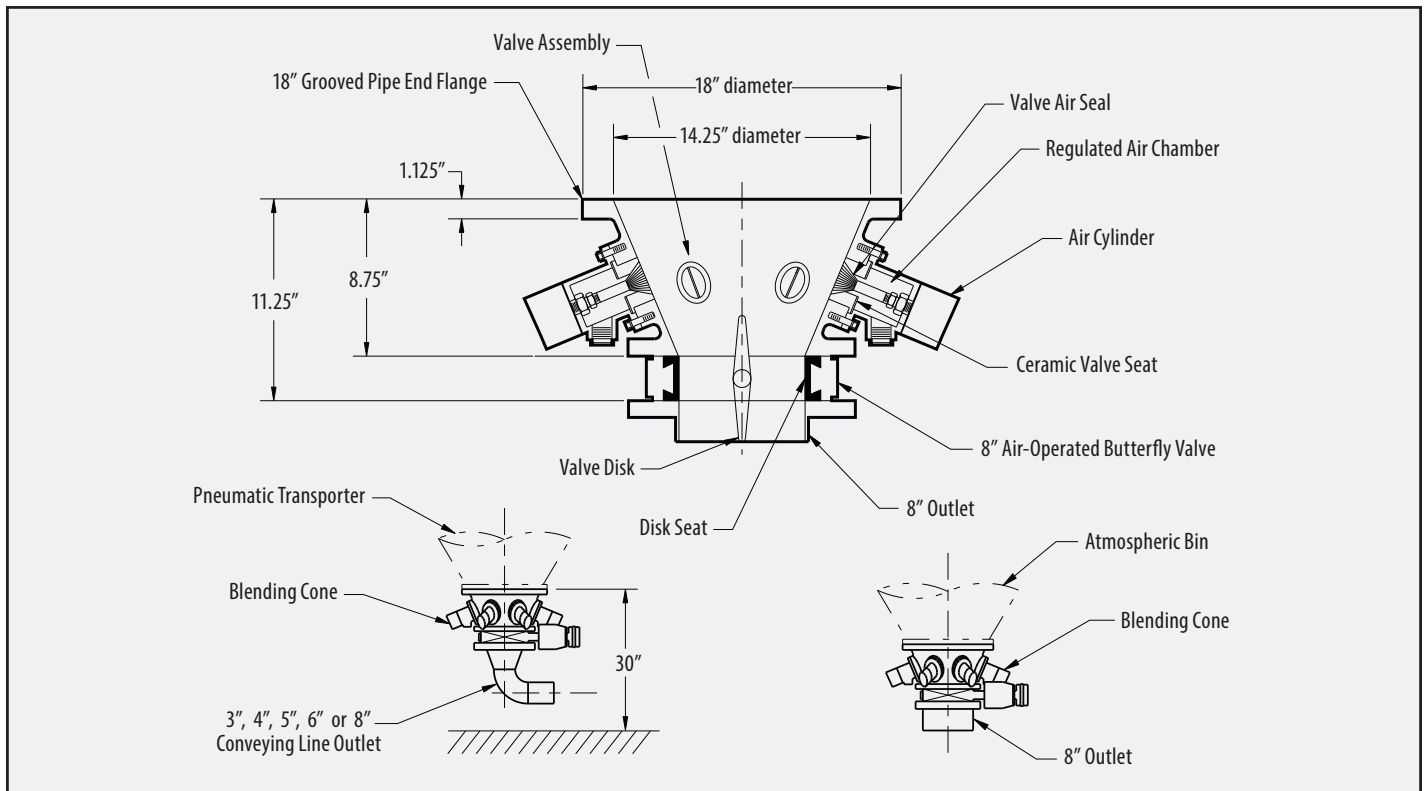

Specifications subject to change without notice.

TRUSTED TO DELIVER™

Nol-Tec Systems, Inc | 425 Apollo Drive | Lino Lakes, MN 55014
651.780.8600 | sales@nol-tec.com | www.nol-tec.com

5.017.SALE.10.23.18.04

