



SILO BLENDING CONE

*The Nol-Tec silo blending cone
homogeneously blends dry materials in
storage silos.*

STANDARD FEATURES:


- 12 air injection valve assemblies controlled by two solenoid valves for piston sequencing
- Ceramic valve seat directs air into material at various angles
- Abrasion-resistant urethane valve seal
- Non-restrictive discharge valve with positive position indicator
- Wear parts are replaceable without removing silo blending cone from position
- Regulated air supply manifold; 4" pipe

SPECIFICATIONS:

- **Weight:** 1,050 lbs
- **Compressed air:** Clean and dry at 80 PSIG minimum
- **Electrical:** 24VDC
- **Temperature:** 200° F

OPTIONAL FEATURES:

- Interior coatings and finishes
- Stainless steel construction
- Explosion-proof electrical
- Special mounting flange
- Sanitary design
- High-temperature design
- **Electrical:** 110-120V; 50-60Hz

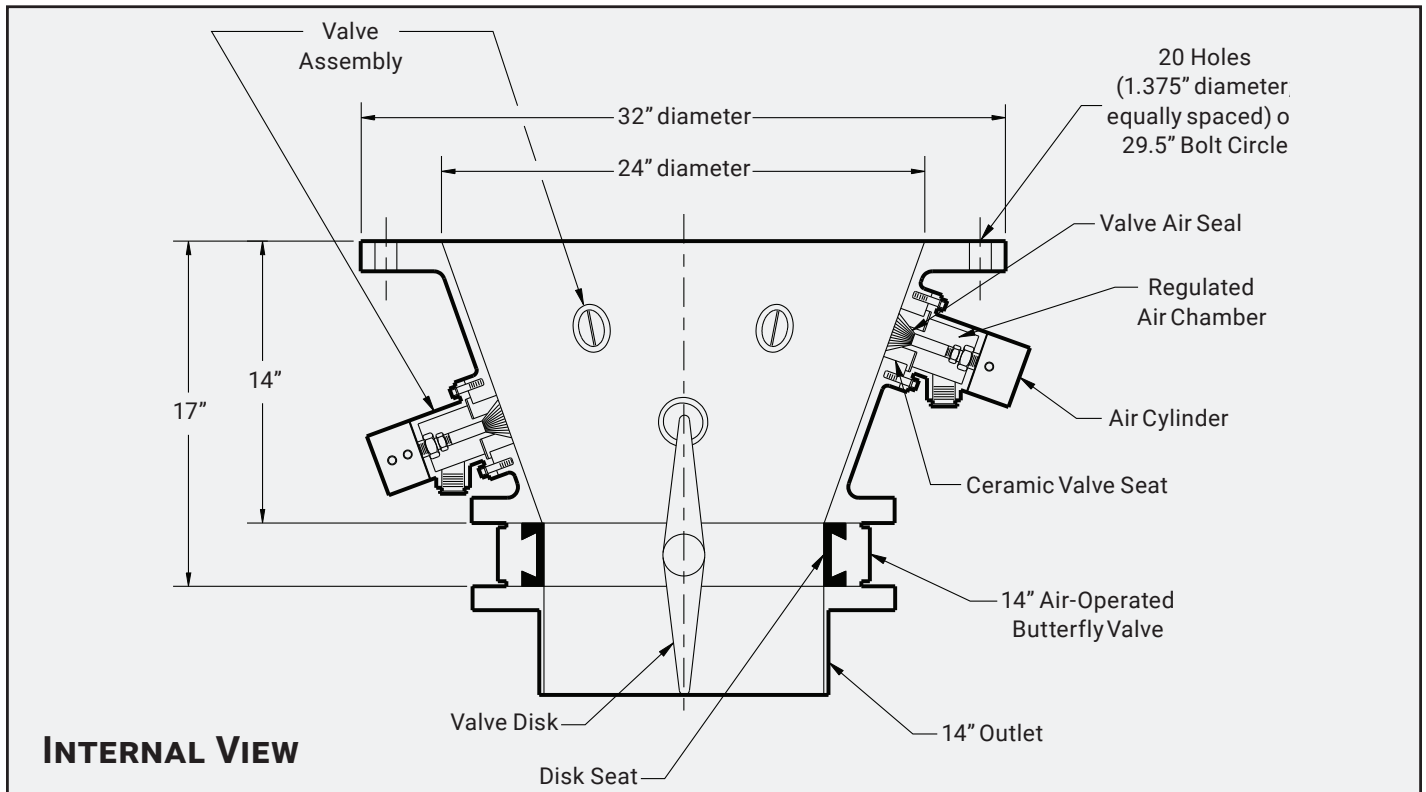

Specifications subject to change without notice.

TRUSTED TO DELIVER®

Nol-Tec Systems, Inc | 425 Apollo Drive | Lino Lakes, MN 55014
651.780.8600 | sales@nol-tec.com | www.nol-tec.com

5.027.SALE.10.23.18.03

