



3-WAY AUTOMATIC HOSE SWITCH

The Nol-Tec 3-way automatic hose switch diverts dry, abrasive, or difficult-to-handle materials with minimal product degradation and cross-contamination.

STANDARD FEATURES:

- Pressure and vacuum, dense and dilute phase conveying
- Heavy-duty carbon steel construction
- Stainless steel seal and slide plates
- Abrasion-resistant rubber hose
- Dual air cylinder positioning
- Conveying pressure up to 75 PSIG
- Suitable for converging or diverging applications
- Urethane sealing rings
- Unused ports blocked and sealed
- Reed switches to indicate position
- Clean-wipe seal controls
- Support brackets


SPECIFICATIONS:

- **Compressed air:** Clean and dry at 80 PSIG minimum
- **Electrical:** 24VDC
- **Temperature:** 180° F intermittent; 150° continuous

OPTIONAL FEATURES:

- Stainless steel construction
- Stainless steel product contact areas
- FDA white rubber hose
- Hazardous location design
- Flanged connections
- High temperature design
- Support frame
- Electrical: 110-120V; 50-60Hz
- Contact Nol-Tec with any special requirements

3-Way Automatic Hose Switch									
Size	A	B	C	D	E	F	G	H	J
3.00"	63.13"	7.00"	27.13"	8.00"	70.00"	4.50"	59.5"	16.00"	4.00"
4.00"	66.94"	8.00"	24.38"	9.50"	82.00"	4.50"	72.25"	17.00"	4.00"
5.00"	73.75"	9.00"	26.75"	10.50"	87.00"	4.50"	76.72"	21.00"	4.50"
6.00"	80.00"	10.00"	28.50"	11.50"	100.87"	5.50"	89.00"	21.50"	4.50"

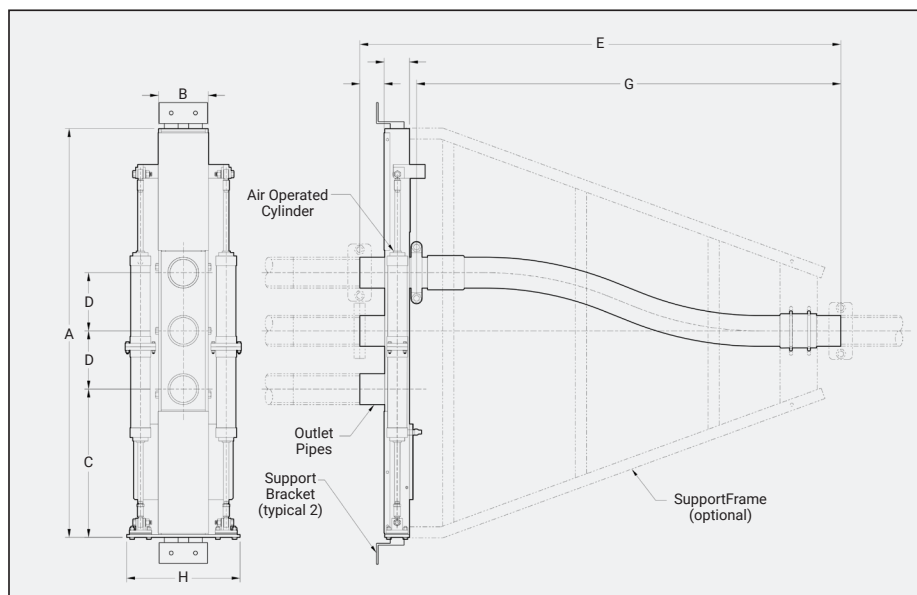

Specifications subject to change without notice

TRUSTED TO DELIVER®

Nol-Tec Systems, Inc | 425 Apollo Drive | Lino Lakes, MN 55014
651.780.8600 | sales@nol-tec.com | www.nol-tec.com

5.181.SALE.01.08.24.03

