



NOL-TEC
SYSTEMS

ROUND BIN VENTS

Nol-Tec round dust collectors effectively filter dust-laden air created by pneumatic conveying systems or other processes where higher pressures are required.

STANDARD FEATURES:

- Heavy gauge continuous welded construction
- Venturi reverse jet cleaning
- Continuous cleaning design
- Bottom grid
- Cartridge or bag filter media
- Magnehelic gauge
- Bird screen and weatherhood
- Quick-release bag clamps
- Access door designed for up to 17" w.g.


SPECIFICATIONS:

- **Compressed air:** Clean and dry 80 PSIG minimum
- **Temperature range:** Polyester bags 270° F; Polyester cartridge & urethane ends 225° F
- **Electrical:** 24 VDC

OPTIONAL FEATURES:

- Stainless steel construction
- Hazardous location design
- High-temperature design
- Variety of filter media materials available
- Exhauster
- Hopper bottom
- Additional access doors
- High pressure models designed for up to 5 PSI with reinforced housing
- Differential automatic cleaning
- **Electrical:** 110-120V; 50-60Hz

Round Dust Collectors							
M321 Low Pressure Model #	M323 High Pressure Model #	Cartridge Filter Area	Bag Filter Area	A	B	C	D
36-LPRD-9	36-HPRD-9	180 ft ²	41 ft ²	60.0"	30.0"	32.5"	28.0"
60-LPRD-9	60-HPRD-9	270 ft ²	68 ft ²	84.0"	30.0"	32.5"	28.0"
84-LPRD-9	84-HPRD-9	540 ft ²	95 ft ²	108.0"	30.0"	32.5"	28.0"
36-LPRD-14	36-HPRD-14	280 ft ²	64 ft ²	60.0"	36.0"	38.5"	32.0"
60-LPRD-14	60-HPRD-14	420 ft ²	105 ft ²	84.0"	36.0"	38.5"	32.0"
84-LPRD-14	84-HPRD-14	840 ft ²	147 ft ²	108.0"	36.0"	38.5"	32.0"
36-LPRD-18	36-HPRD-18	360 ft ²	81 ft ²	60.0"	42.0"	44.5"	40.0"
60-LPRD-18	60-HPRD-18	540 ft ²	135 ft ²	84.0"	42.0"	44.5"	40.0"
84-LPRD-18	84-HPRD-18	1,080 ft ²	189 ft ²	108.0"	42.0"	44.5"	40.0"
36-LPRD-24	36-HPRD-24	480 ft ²	108 ft ²	60.0"	48.0"	50.5"	44.0"
60-LPRD-24	60-HPRD-24	720 ft ²	180 ft ²	84.0"	48.0"	50.5"	44.0"
84-LPRD-24	84-HPRD-24	1,440 ft ²	252 ft ²	108.0"	48.0"	50.5"	44.0"
36-LPRD-32	36-HPRD-32	640 ft ²	144 ft ²	60.0"	54.0"	56.5"	52.0"
60-LPRD-32	60-HPRD-32	960 ft ²	240 ft ²	84.0"	54.0"	56.5"	52.0"
84-LPRD-32	84-HPRD-32	1,920 ft ²	336 ft ²	108.0"	54.0"	56.5"	52.0"
36-LPRD-38	36-HPRD-38	760 ft ²	171 ft ²	60.0"	60.0"	62.5"	56.0"
60-LPRD-38	60-HPRD-38	1,140 ft ²	285 ft ²	84.0"	60.0"	62.5"	56.0"
84-LPRD-38	84-HPRD-38	2,280 ft ²	399 ft ²	108.0"	60.0"	62.5"	56.0"
36-LPRD-46	36-HPRD-46	920 ft ²	207 ft ²	60.0"	66.0"	68.5"	64.0"
60-LPRD-46	60-HPRD-46	1,380 ft ²	345 ft ²	84.0"	66.0"	68.5"	64.0"

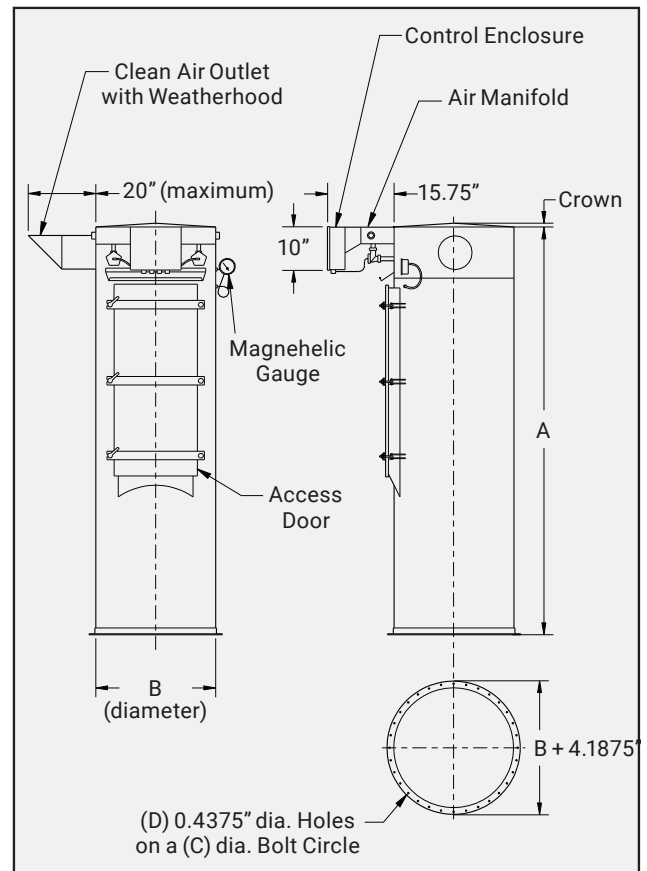

Specifications subject to change without notice.

TRUSTED TO DELIVER®

Nol-Tec Systems, Inc | 425 Apollo Drive | Lino Lakes, MN 55014
651.780.8600 | sales@nol-tec.com | www.nol-tec.com

5.033.SALE.10.23.18.05

